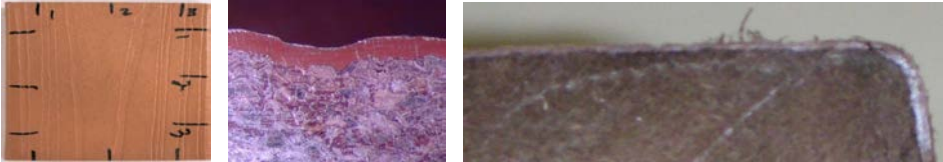


| | |
|--|---|
| <p>Product</p> | <p>Fibron® Horizon® Decking with PermaTech® Innovation</p> |
| <p>Test Report</p> | <p>Surface Adherence Submersion Test Data Results</p> |
| <p>Test Description</p> | <p>21 °C and 66 °C Full Submersion Test</p> <p>The submersion test involves testing the Horizon decking samples fully submerged in water. The temperature of the water is held constant during the period of the test. Tests are conducted at 21 °C and 66 °C. Samples are held in submersion for 30 days, with weekly checks to determine whether delamination of the product occurs as a result of the submersion test.</p> |
| <p>Observation</p> | <p>Repetitive tests have resulted in no delaminating of the Fibron Horizon decking surface at the edge locations, perimeters or at any point of the product face.</p> <p>The Horizon decking surface is not compromised.</p> <p>The photos below show the Horizon board after the 30-day Submersion Test and the magnified Fibron Horizon decking's cross-linked adherence to the composite core.</p>  |
| <p>Conclusion</p> | <ul style="list-style-type: none"> Continued submersion of Horizon Decking for 30 days in water at 21 °C and 66 °C did not result in any reduction of adherence between the Fibron Horizon decking surface and the core materials of Horizon Decking. The Fibron Horizon decking surface shares molecular bonding with the composite core which did not fail or delaminate when fully submerged in both ambient temperature water and artificial extreme heat environments. |
| <p>Additional Product Information</p> | <ul style="list-style-type: none"> Ultra low maintenance with superior stain, fade and mould resistance Patent pending PermaTech surface outperforms traditional composite decking Reversible boards save on cut and waste Board Size: 137 mm x 24 mm Grooved decking available in 3.66, 4.88 & 6.10 m. Square edge decking available in 6.10 m. |